


转接环 EF-EOS M II

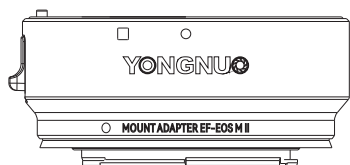


在使用本产品前，请务必先仔细阅读本产品使用说明书，在充分理解内容的基础上，正确使用。请妥善保管好本说明书，以便日后能随时查阅。

感谢您购买永诺产品！永诺EF-EOS M II是一款可将EF系列镜头用于EOS M卡口相机的转接环。本产品搭载电子触点，可实现自动对焦、自动曝光等镜头自带的其他功能。

⚠ 使用注意事项

- 当您所使用的镜头比相机还要重时，在使用过程中请务必握住镜头。
- 卸下转接环后，请务必安装前后盖以保护电子触点。
- 划痕、污渍或指纹可能导致通信不良或腐蚀，从而导致转接环故障。若电子触点被弄脏，用软布擦净。
- 经转接环转接后，镜头的最近对焦距离会稍微变长，最大放大倍率和视角会产生变化。
- 转接环后侧卡口安装有橡皮环以提高防尘和防水性能。此橡皮环可能会造成相机镜头卡口周围出现摩擦痕迹，但这不会影响使用。
- 安装转接环后，如果相机出现异常情况，请尝试关闭电源并取下电池后再装上电池重新开机，如果情况依旧则请联系永诺售后热线400-001-3888或发送邮件至 service@hkyongnuo.com

部件名称

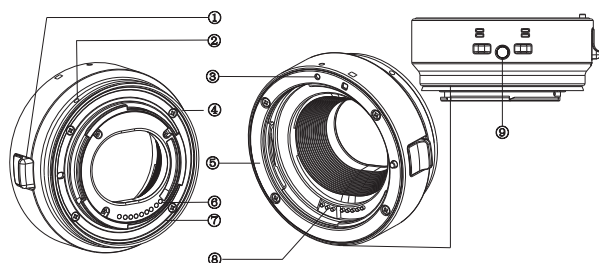

- ① 镜头释放杆
- ② 安装标记（相机端）
- ③ 安装标记（镜头端）
- ④ 橡胶环
- ⑤ 正面卡口
- ⑥ 电子触点（相机端）
- ⑦ 背面卡口
- ⑧ 电子触点（镜头端）
- ⑨ 三角架座槽





安装和卸下转接环

安装转接环

1. 关闭相机电源。
2. 将镜头安装到转接环上。
将镜头上的安装标记与转接环上的相同标记对齐，然后以顺时针方向转动镜头直到听到喀的一声为止。（如图①）
3. 将装好镜头的转接环安装到相机上。
将转接环上安装标志与相机上的相同标记对齐，然后以顺时针方向转动转接环，直至听到喀的一声为止。（如图②）

卸下转接环

1. 关闭相机电源。
2. 将安装着镜头的转接环从相机上卸下。
按住相机上的镜头释放按钮，同时以逆时针方向转动转接环，在转接环停止转动时将其取下。（如图③）
3. 将镜头从转接环上卸下。
按住转接环上的镜头释放杆，同时以逆时针方向转动镜头，在镜头停止转动时将其取下。（如图④）



规格

- 兼容镜头：EF系列镜头
- 兼容相机：EOS M卡口系列相机
- 产品尺寸：70.6*67.8*32.7毫米
- 重量：约73克
- 附件：前盖、后盖

本使用说明书中的功能是依据本公司的测试条件获得的设计和规格如有变更，恕不另行通知。

深圳市永诺电器有限公司


深圳市坪山区坑梓街道秀新社区锦绣东路14号A1栋209A座
A2栋2-5楼

400-001-3888

www.hkyongnuo.com

招商热线: sales@hkyongnuo.com

MOUNT ADAPTER EF-EOS M II




Before using this product, please read this instruction manual thoroughly to learn product function and proper use. Keep this manual properly for reference in the future.

Thanks for choosing YONGNUO products!
YONGNUO EF-EOS M II is a smart adapter which can adapt EF series lenses to EOS M mount cameras. For this smart adapter carries electronic contact, the auto-focusing function, auto-exposure function and other function of the lens can be achieved.

⚠ Announcements

- When the lens being used is heavier than the camera, please hold the lens steadily.
- After removing adapter, please put on the front cover and rear cover to protect the electronic contact.
- Scratch, dirty mark or fingerprint may lead to bad communication or corrosion, and result in adapter malfunction. If the electronic contact gets dirty, please wipe it with soft cloth.
- After adapted by this smart adapter, the closest focusing distance of the lens will be extended slightly, the maximum amplification factor and the view angle will be different.
- The rear mount on the adapter has been fitted with a rubber ring to improve dust-resistance and water-resistance or mance. This rubber ring may cause friction marks to appear around the camera's lens mount, although this will have no effect on usage.
- After this smart adapter is mounted, if the state of the camera abnormal, please try to turn off the power supply of the camera, remove the batteries for a while, put the batteries back in and turn on the camera again. If the situation remains unchanged, please contact YONGNUO customer service at 400-001-3888 or write email to service@hkyongnuo.com.

Components

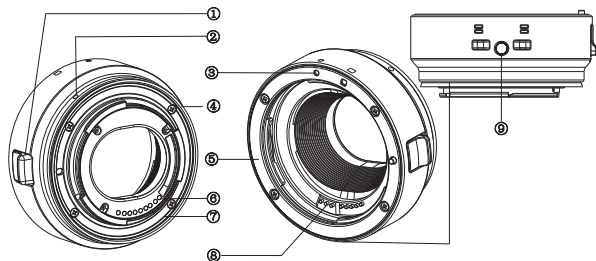

- ① Lens release lever
- ② Camera installation sign
- ③ Lens installation sign
- ④ Rubber ring
- ⑤ Front mount
- ⑥ Electronic contact (camera-end)
- ⑦ Rear mount
- ⑧ Electronic contact (lens-end)
- ⑨ Tripod stand slot





Installation & Remove Instruction of the Adapter

● Installation

1. Turn the camera off.
2. Install the lens on the adapter.
Align the installation sign on the lens to the installation sign on the adapter, and rotate the lens clockwise until a "click" sound is heard.
3. Install the lens with smart adapter on the camera.
Align the installation sign on the adapter to the installation sign on the camera, and rotate the adapter clockwise until a "click" sound is heard.

● Remove

1. Turn the camera off.
2. Remove the lens with smart adapter from the camera.
At the same time when you press the lens release button on the camera, rotate the smart adapter counter clockwise until it stops rotating, and then remove the adapter.
3. Remove the adapter from the lens.
At the same time when you press the lens release lever on the adapter, rotate the lens counter clockwise until it stop rotating, and then remove the lens.



Specification

- Lens compatible: EF series Lens
- Camera compatible: EOS M mount cameras
- Product size: 70.6*67.8*32.7mm
- Weight: approx. 73g
- Accessories: Front Cap, Rear Cap

The functions on this manual are obtained based on the test conditions of our company. Further notice will not be given if there are any changes for the design and specification.

Shenzhen YONGNUO Electronic Equipment Co., Ltd
Room 209 Building A1&F/2-5, Building A2, Block A, No. 14 Jinxiu East Road, Xiuxin Community, Kengzi Street, Pingshan District, Shenzhen

400-001-3888 www.hkyongnuo.com
Business Email: sales@hkyongnuo.com