

YONGNUO



YN660S

使用说明书

User Manual


前言

感谢您使用YN660S摄像灯，在使用产品前，请认真阅读使用说明书。

注意事项

- 严禁将产品靠近或者投入火源，以避免发生火灾及爆炸等危险。
- 请勿私自拆卸产品，如产品出现故障须本公司或授权维修人员处理。
- 请勿在易燃易爆和暴露在雨中使用。

产品规格

| | | | | |
|--------------------------|---|----------|--------------|---------|
| 光源 | 672颗灯珠 | | | |
| 色温 | 可调色温：3200K-5600K | | | |
| 最大输出功率 | 60瓦 | | | |
| 照度 | 距离 | 0.3米 | 0.5米 | 1米 |
| | 3200K | 11900Lux | 7300Lux | 2825Lux |
| | 4000K | 21430Lux | 12784Lux | 4890Lux |
| | 5600K | 14854Lux | 8852Lux | 3455Lux |
| 摄像灯重量 | 约1430克 | 摄像灯尺寸 | 765*76*105毫米 | |
| 外接电池 | 两个NP-F系列电池（需另购） | | | |
| 外接电源 | DC 12V5A、接口尺寸 \varnothing 5.5*2.1mm  （需另购） | | | |
| 遥控距离 | 小于15米 | | | |
| 平均寿命 | 50000小时 | | | |
| 光照角度 | 55° | | | |
| 所含物品：摄影灯（1）收纳包（1）说明书（1）。 | | | | |
| 注：如有缺失请与经销商联系。 | | | | |

产品结构



安装与使用

1、多种供电方式。

(1).使用电池供电。


请按箭头方向安装NP-F系列电池使用，取下请按下电池锁扣。须同时安装两个NP-F系列电池才能点亮使用。



(2).使用DC电源供电。(电源适配需选购)



请使用输出为DC-12V5A电源适配器。




2、开机与关机。

拨动电源开关进行开机。




3、色温与亮度设置。

按下<Tem>按键进入色温模式，按下确认键切换色温与亮度调节选项，旋转调节设置参数。

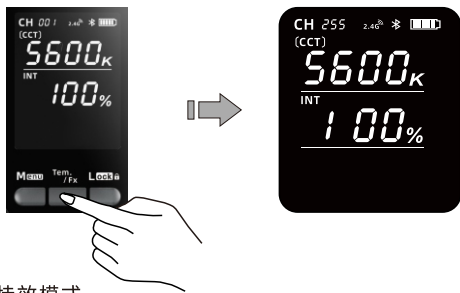


4、特效模式。

按<Fx>进入特效模式，短按确认键切换模式、速度、亮度设置，旋转调节参数；再次按下<Fx>切换回色温模式。

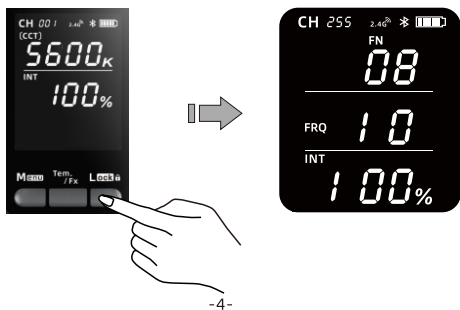


5、切换频道。

按下<Menu>按键进入设置界面，选择频道[CH]菜单，按下确认键旋转旋钮调节到您所需要的频道；再次按下确认键完成切换。（注：CH1-CH8频道兼容永诺早期摄像灯产品，建议使用CH9以上频道，将获得更顺畅的控制体验。）

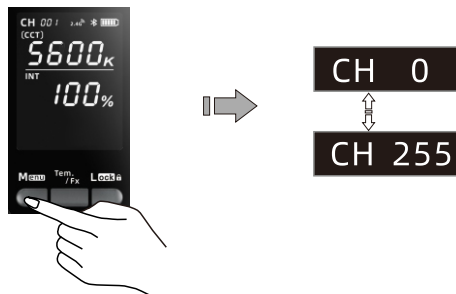

6、LOCK模式

按下LOCK键锁定当前模式，再次按下解除锁定。

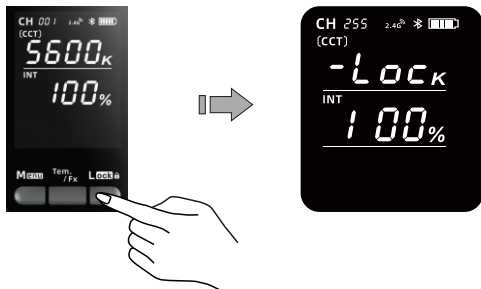

7、手机APP与遥控器的使用。

- (1).按下<Menu>按钮旋转调节旋钮选择蓝牙<📶>,按下确认键开启蓝牙;此时打开手机APP就可以自动连接摄像机实现无线控制。
- (2).2.4G无线控制模式可选择关闭。
- (3).APP可以从永诺官网下载或通过扫描彩盒二维码点击下载。



蓝牙 OFF



蓝牙 ON



2.4G OFF



2.4G ON



APP下载



永诺官网

本手册中的功能是依据本公司的测试条件获得，设计和规格如有变更，恕不另行通知。
深圳市永诺摄影器材股份有限公司
地址：深圳市坪山区坑梓街道深福保现代光学厂区A座
电话：（86）0755-83762448
传真：（86）0755-83762765
网址：www.hkyongnuo.com
生产地址：深圳市坪山新区坑梓街道锦绣中路14号
深福保现代光学厂区A栋厂房
售后电话：400-001-3888


Introduction

Thank you for using YN660S video light. Please read the manual carefully before you use it.


Precautions

- Do not put the product close to or throw it into the fire source to avoid the danger of fire and explosion.
- Do not disassemble the product, maintenance or repair of this product should be handled by technical maintenance personal of our company or authorized technical maintenance personal .
- Do not use this product in flammable and explosive place, or where it can be exposed to moisture.

Product specification

| | | | | |
|---|--|------------------------------------|--------------|---------|
| Color temperature version | 672 LED beads | | | |
| Light Source | Adjustable: 3200K-5600K | | | |
| Maximum output power | 60W | | | |
| 100% illumination | Distance | 0.3M | 0.5M | 1M |
| | 3200K | 11900Lux | 7300Lux | 2825Lux |
| | 4000K | 21430Lux | 12784Lux | 4890Lux |
| | 5600K | 14854Lux | 8852Lux | 3455Lux |
| Product Net Weight | Approx1430g | Product Net Size | 765*76*105mm | |
| Compatible batteries | Two NP-F series batteries (Need to be purchased separately.) | | | |
| External power source | DC 12V5A , Interface size $\varnothing 5.5 \times 2.1 \text{mm}$  | | | |
| Control distance | <15M | (Need to be purchased separately.) | | |
| Average Service Life | 50000H | | | |
| Luminance Angle | 55° | | | |
| Contents: Video ligh*1, Storage bag*1, User mananl*1. | | | | |
| Note: Please contact your dealer if anything missinh. | | | | |

Product structure

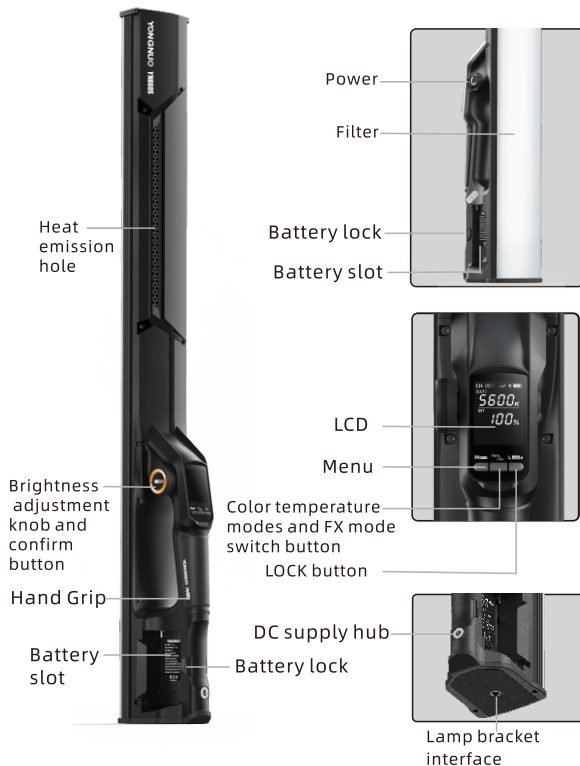

Installation and use

1. Multiple power supply modes.

(1).Use batteries power supply.

Please install the NP-F series batteries in the direction of the arrow, and please press the battery lock when removing the batteries.




(2).Use DC power for power supply.

(Power adapter needs to be purchased separately)



Please use the power adapter with output of DC-12V5A.




2.Power on and off

Toggle the Power ON&OFF button to switch the product on and off.



3.Color temperature and brightness adjustment
Press the button <Tem> to enter the color temperature mode,press the confirm button to switch the color temperature and brightness adjustment options,and turn the knob to adjust parameters; long press the confirm button (to) enter the reddish and greenish adjustment function,and turn the knob to adjust parameters.



4. Special Effects Mode


Press the < Fx > to enter the special effects mode, short press the confirm button to switch the mode, speed and brightness settings, and rotate to adjust the parameters; press the < Fx > again to switch back to the color temperature mode.式。






5. Switch channels

Press the button <Menu> and toggle the confirm button to select the channel [CH] menu, then turn the knob to adjust the channel you want; press OK to complete the switch. (Note: CH1-CH8 channels are compatible with YONGNUO's early video light products. It is recommended to use channels above CH9 to get a smoother control experience.)

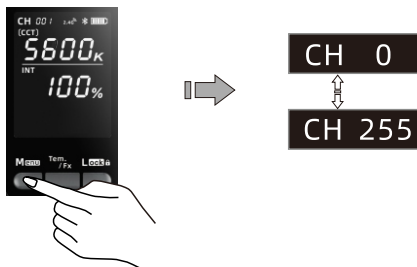

6. LOCK Mode

Press the LOCK button to lock the current mode, and press again to unlock.

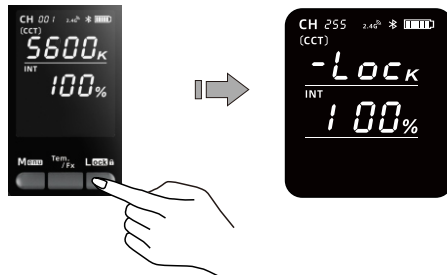

7. Use via mobile APP and remote control for wireless control

- (1). Press the menu button < * > and toggle the OK button to select bluetooth, press OK button to turn on bluetooth; open the mobile APP, at this time the video light is connected automatically to realize wireless control.
- (2). ON or OFF of 2.4G Wireless Control Mode.
- (3). The APP can be downloaded from the YONGNUO official website or scanning the QR code on the gift box.



Bluetooth off



Bluetooth on



2.4G off



2.4G on



APP Download



YONGNUO Web

The functions in this manual are based on the test conditions our company. Further notice will not be given if the design and specifications change.